


PVC SHRINKABLE FILM MAKING MACHINE

PVC 收縮膜高速吹袋機



其陽工業股份有限公司
Chyi Yang Industrial Co., Ltd.

Model No.	PVC-35	PVC-45	PVC-55	PVC-65
Raw Material 使用原料	PVC			
Roller Width 輪寬 (mm)	300	450	600	800
Layflat Width 膜寬 (mm)	40-220	70-350	140-550	200-700
Film Thickness 膜厚 (mm)	0.02-0.08			
Output 產量 (kg/hr.)	6-17	12-28	15-38	20-55
★ ★ EXTRUDER 押出機★ ★				
Gear Box 齒輪箱	Surface heat quenching & tempering treatment equipped w/oil auto. Lubrication sys. 表面經調質，配備自動油 & 水循環系統			
Screw Diameter 螺桿直徑 (mm)	35	45	55	65
Screw Ratio 長徑比 (L/D)	25:01:00			
Drive Motor 主馬達 (HP)	10	20	25	30
Blower 風車 (HP)	1	2	3	
Die Diameter 模頭直徑 (mm)	20 & 50	40 & 80	50 & 100	60 & 120
★ ★ TAKE-UP UNIT & HOT WATER TANK 引取機 & 熱水槽★ ★				
Take-Up Motor 引取馬達 (HP)	AC 1/2HP x 1 set AC 1HP x 2 sets	AC 1HP x 1 set AC 2HP x 2 sets	AC 1HP x 1 set AC 2HP x 2 sets	AC 1HP x 1 set AC 2HP x 1 set AC 3HP x 1 set
Hot Water Tank 熱水槽 (set)	1			
Pre-Heater 自動溫度控制 (set)	1			
Size Ring 水模 (pc)	5			
★ ★ WINDER 捲取機★ ★				
Type 捲取形式	Central friction & up-and-down w/two winding reels type 中央捲取式 & 上下雙捲			
Winding Reel 捲取輪	2 sets			
Pulling Motor 拉袋馬達（kg/cm）	10 x 1 set	10 X 1 set	15 x 1 set	15 X 1 set
Winding Motor 捲取馬達（kg/cm）	15 x 2 sets	20 X 2 sets	30 x 2 sets	30 X 2 sets
★ ★ TEMPERATURE CONTROL 溫度控制箱 ★ ★				
Heating Zone 溫度控制	4 zones	5 zones		6 zones

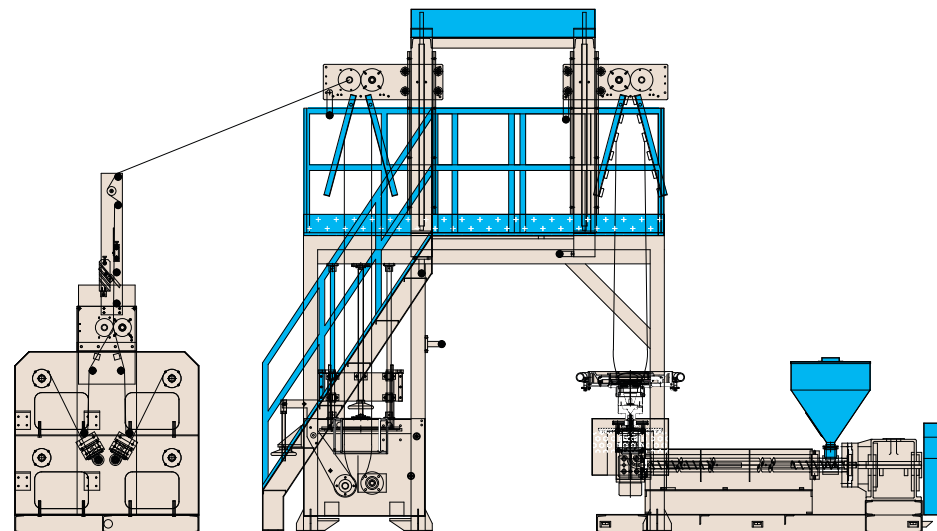

- Capacity depends on film width, thickness, die size, material property etc.
產量依膜寬、膜厚、模頭尺寸、原料特性等不同而變化。
- For more details specification, special requirements & quotation, please kindly contact us. The above specifications are for reference, the correct specifications are subject to official quotation.
詳細的規格、特殊要求 & 報價單，請與我們聯絡。上述規格僅供參考，正確的規格以正式的報價單為主。
- Suggested Optional Auxiliary Device 建議購買配件：Rotary die device, Hopper Loader, Film Width Controller, Air Compressor, Fast Screen Changer etc. 吸料機、自動充氣機、空壓機、快速換網等。



其陽工業股份有限公司
Chyi Yang Industrial Co., Ltd.

333 桃園市龜山區頂湖三街11號

No.11, Dinghu 3rd Street, Guishan District, Taoyuan City 333, Taiwan

TEL : 886-3-328-8686

FAX : 886-3-328-3737

E-Mail : cymw@cymw.com.tw

[http : // www.chiyang.com](http://www.chiyang.com)