


全自動雙層封切機

Fully Automatic Double Layer Sealing & Cutting Machine

CB2P Series

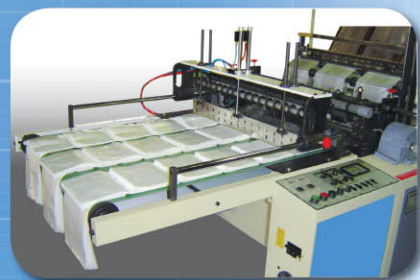

CB3 : 6 lines type

- ◆ CB3P is equipped with punch press can produce 6 lines bottom bags & T-shirt bags.
- ◆ CB3 can produce 6 lines bottom bags, purchase extra punch press can produce T-shirt bags.
- ◆ CB2 can produce 4 lines bottom bags, purchase extra punch press can produce T-shirt bags.

Specifications:

MODEL NO.	型號	CB2P-2830	CB2P-3230	CB2P-4030	CB3P-3230	CB3P-4030
Bag width	封切寬度	12" x 4 lines	14" x 4 lines	18" x 4 lines	9" x 6 lines	12" x 6 lines
Bag length	最大封切長度	30"	30"	30"	30"	30"
Film thickness (mm) (4 or 6 layers)	袋子厚薄 (四或六層)	0.01~0.15	0.01~0.15	0.01~0.15	0.01~0.15	0.01~0.15
Capacity (pcs/min) * (w/o servo)	產量 (無伺服)	40~120	40~120	40~100	40~120	30~100
	(w/ servo)	50~140	50~140	50~130	50~140	40~130
Drive Motor (HP)	驅動馬達	2 HP	2 HP	2 HP	2 HP	2 HP
Power Required (Kw)	電力需求	3.5	4	5	8.5	10.5
Machine Dimension (m)	機器尺寸	6.1x1.35x2.2	6.1x1.45x2.2	6.1x1.65x2.2	6.5x1.45x2.2	6.5x1.65x2.2

* Output depending on bag width, length, thickness & raw material.

Feature:

1. Double cutters for making bottom bags and T-shirt bags.
2. CB2P & CB2 are equipped with four feeding devices, CB3P & CB3 are equipped with six feeding devices.
3. Equipped with conveyor & heat needle device.
4. The machine will stop automatic when there is no film, stuck film & lower temperature.
5. Servo motor & photocell are options.

特性:

1. 上下雙刀可製造底封袋及背心袋
2. CB2P & CB2 配備四個入料, CB3P & CB3 配備六個入料
3. 機器備有輸送帶及熱針裝置
4. 無料、擠袋、溫度過低時會自動停機
5. 可選購伺服馬達及印刷電眼



其陽工業股份有限公司
Chyi Yang Industrial Co., Ltd.
333 桃園市龜山區頂湖三街11號
No.11, Dinghu 3rd St., Guishan District, Taoyuan
City 333, Taiwan

TEL : 886-3-328-8686
FAX : 886-3-328-3737
E-Mail : cymw@cymw.com.tw
http : // www.chiyang.com

全自動熱封背心袋製袋機

Fully Automatic 2-Line Heat Sealing T-Shirt Bag Making Machine

CTP & CTPP Series



Specifications:

MODEL NO. 型號	CTP-2030	CTP-2830	CTP-3230	CTTP-3230	CTTP-4030
Bag width 袋寬	18"	26"	30"	14" + 14"	16" + 16"
Bag length 袋長	30"	30"	30"	30"	30"
Film thickness (total layers) 袋厚 (總厚度)	0.01~0.15MM	0.01~0.15MM	0.01~0.15MM	0.01~0.15MM	0.01~0.15MM
Capacity (without servo motor)* 產量 (無伺服)*	30~120pcs/min	30~120pcs/min	30~120pcs/min	30~120pcs/min X 2 lines	30~120pcs/min X 2 lines
Capacity (with servo motor)* 產量 (有伺服)*	40~130pcs/min	40~130pcs/min	40~130pcs/min	40~130pcs/min X 2 lines	40~130pcs/min X 2 lines
Drive Motor (HP) 馬達	2 HP	2 HP	2 HP	2 HP x 2 sets	2 HP x 2 sets
Power Required 總耗電量	3KW	6KW	8.5KW	8KW	10KW
Machine Dimension 機械尺寸	4.9 x 1.3 x 1.5M	4.9 x 1.5 x 1.5M	4.9 x 1.7 x 1.5M	4.9 x 1.7 x 1.5M	4.9 x 1.9 x 1.5M

* Output depending on bag width, length, thickness & raw material.

◆ For more details specification, special requirements & quotation, please kindly contact us.

* 產量會依照袋寬、袋長、袋厚及原料等而改變

◆ 需要更詳細的規格, 或有特殊的要求及報價, 請跟我們聯絡

Feature:

1. Specialized for producing T-Shirt bags with heat cutting for non-tension sealing
2. CTP Series is equipped with one feeding devices & one printing mark photocell, CTPP Series has two feeding devices and two printing mark sensor
3. Machine is automatically stopped if a bag is jam or miss the printing mark
4. A puncher and conveyor unit in-line are for full automatic printed T-shirt bag production to save labor costs
5. Servo motor is an option
6. We didn't show all specification & model, please kindly contact us for other model & details specification

特性:

1. 備有熱封刀專門生產背心袋, 袋子封口不會被拉延
2. 型號 CTP 配備單入料及一個印刷電眼, 型號 CTPP 配備雙入料及兩個印刷電眼
3. 無料、擠袋、印刷電眼沒抓到訊號、溫度過低時會自動停機
4. 自動沖床和機器連線, 可節省人力
5. 可選購伺服馬達
6. 以下的規格並未展示所有型號, 麻煩聯絡我們以詢問其他規格



其陽工業股份有限公司
Chyi Yang Industrial Co., Ltd.

