

橡膠版印刷機

**FLEXOGRAPHIC
PRINTING
MACHINE**



2006
CF- 2008
2010

二色橡膠版印刷機


2 COLORS FLEXOGRAPHIC
PRINTING MACHINE



4006
CF- 4008
4010

四色橡膠版印刷機


4 COLORS FLEXOGRAPHIC
PRINTING MACHINE

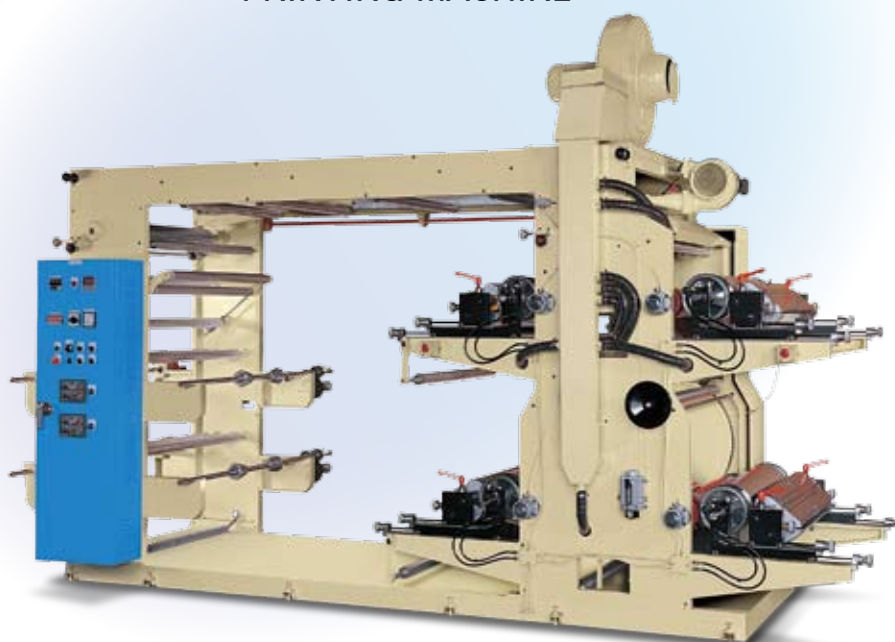

6006
CF- 6008
6010

六色橡膠版印刷機

6 COLORS FLEXOGRAPHIC
PRINTING MACHINE

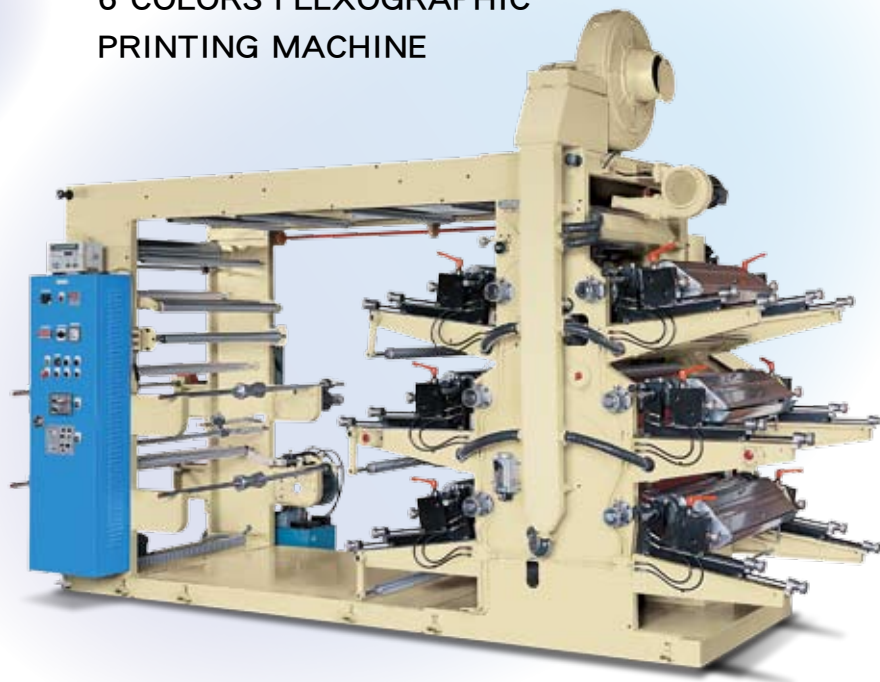

2、4、6色橡膠板印刷機規格表
Specification of 2、4、6 Colors Flexographic Printing Machine.

Model 型號	CF-2006	CF-2008	CF-2010	CF-4006	CF-4008	CF-4010	CF-6006	CF-6008	CF-6010
Printing Width 印刷寬度 (mm)	500	800	1000	500	800	1000	500	800	1000
Printing Colors 印刷顏色	2			4			6		
Max. Printing Speed 最快印刷速度	60 M/min.			60 M/min.			60 M/min.		
Max. Film Width 最大袋寬 (mm)	600	900	1100	600	900	1100	600	900	1100
Printing Length 印刷長度 (mm)	200-1200			200-1200			200-800		
Printing Composition 印刷組合	0+2, 1+1			0+4, 1+3, 2+2			0+6, 1+5, 2+4, 3+3		
Main Motor 主馬達 (HP)	2	3	3	3	5	7.5	5	7.5	7.5
Heater 電熱 (kw)	7	10	13	13	16	19	13	16	19
Blower 風車 (HP)	1/2 x 1 set 2 x 1 set	1/2 x1 set 5 x 1 set	1/2 x1 set 5 x 1 set	1/2 x1 set 5 x 1 set	1/2 x1 set 5 x 1 set	1/2 x1 set 7.5 x 1 set	1/2 x1 set 5 x 1 set	1/2 x1 set 5 x 1 set	1/2 x1 set 7.5 x 1 set
Ink Motor 油墨馬達 (HP)	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2
Pulling Motor 拉袋馬達 (kg/cm)	30 x 1 set	30 x 1 set	50 x 1 set	30 x 2 sets	30 x 2 sets	50 x 2 sets	30 x 2 sets	30 x 2 sets	50 x 2 sets
Total Capacity 總電力 (kw)	13	16	18	20	23	25	22	25	28
Machine Dimension 機械尺寸 (M)	2.1x1.8x2.6	2.1x2.1x2.6	2.1x2.26x2.6	4.35x1.9x2.8	4.35x2.1x2.8	4.35x2.3x2.8	4.35x1.9x2.8	4.35x2.1x2.8	4.35x2.3x2.8
Net Weight 淨重 (kg)	2000	2300	2500	2500	3800	4000	4000	4500	5000


備註：因技術改善而變更規格不另通知。

Remark: Specifications are subject to change due to technological improvement.

4006
CF-HS 4008
4010

四色橡膠版高速印刷機


4 COLORS FLEXOGRAPHIC
HIGH SPEED PRINTING MACHINE

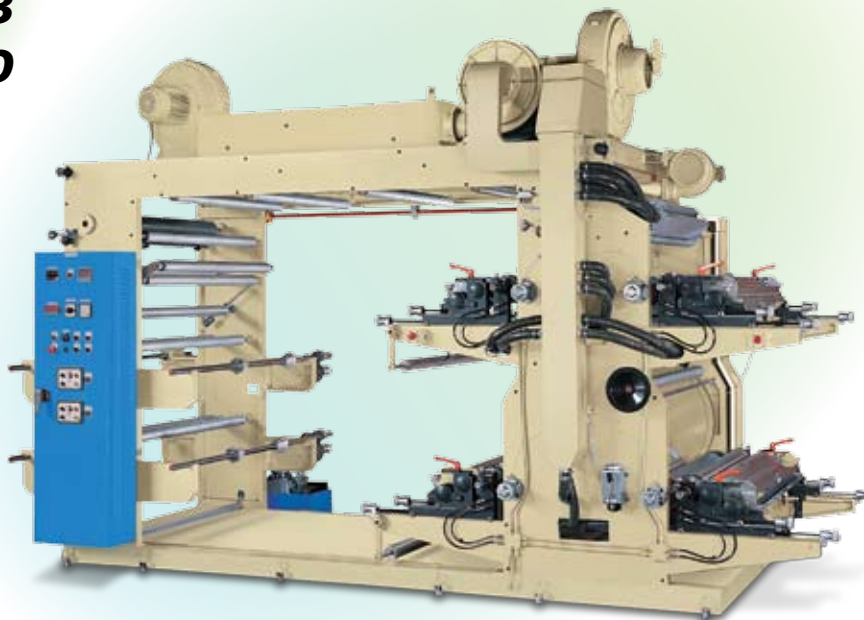

6006
CF-HS 6008
6010

六色橡膠版高速印刷機


6 COLORS FLEXOGRAPHIC HIGH SPEED
PRINTING MACHINE

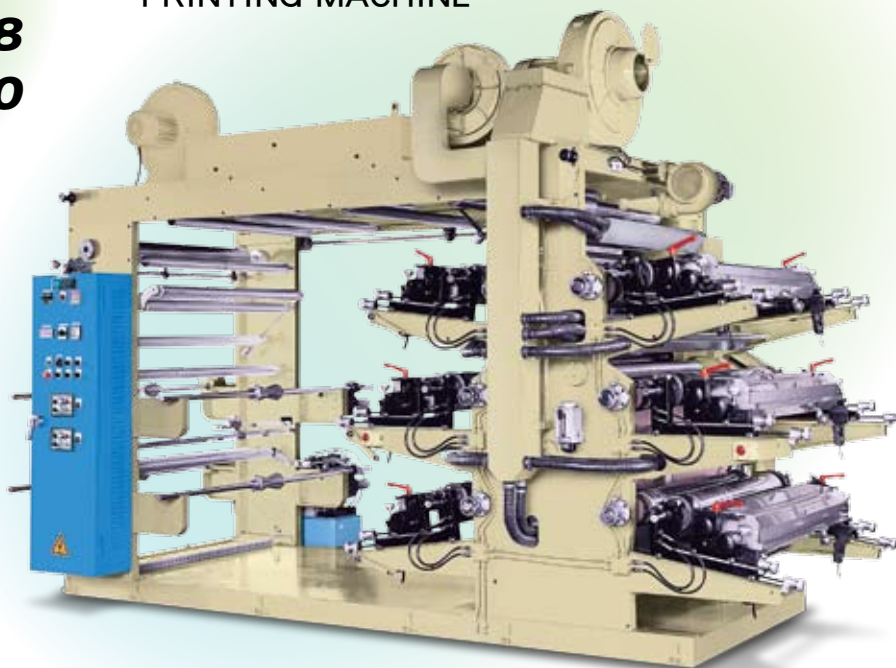

8008
CF-HS 8010
8012

八色橡膠版高速印刷機

8 COLORS FLEXOGRAPHIC HIGH SPEED
PRINTING MACHINE

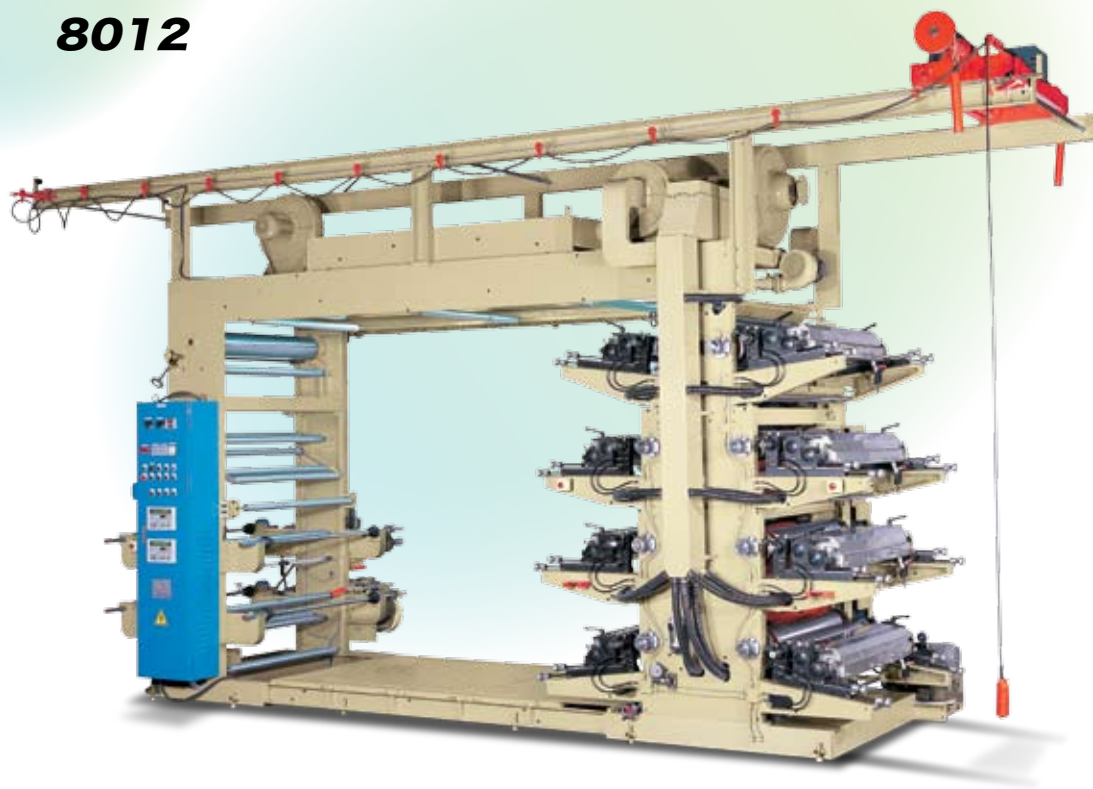

4、6、8色橡膠板高速印刷機規格表

Specification of 4、6 Colors Flexographic High Speed Printing Machine.

Model 型號	CF-HS 4006	CF-HS 4008	CF-HS 4010	CF-HS 6006	CF-HS 6008	CF-HS 6010	CF-HS 8008	CF-HS 8010	CF-HS 8012
Printing Width 印刷寬度 (mm)	500	800	1000	500	800	1000	800	1000	1200
Printing Colors 印刷顏色	4			6			8		
Max. Printing Speed 最快印刷速度	70 M/min.			70 M/min.			70 M/min.		
Max. Film Width 最大袋寬 (mm)	600	900	1100	600	900	1100	900	1100	1300
Printing Length 印刷長度 (mm)	200-1200			200-800			200-1000		
Printing Composition 印刷組合	0+4, 1+3, 2+2			0+6, 1+5, 2+4, 3+3			0+8, 1+7, 2+6, 3+5, 4+4		
E.P.C. 對邊機 (set)	1	1	1	1	1	1	1	1	1
Tension Controller 張力控制 (set)	X	X	X	X	X	X	2	2	2
Main Motor 主馬達 (HP)	5	7.5	7.5	5	7.5	7.5	7.5	10	10
Heater 電熱 (kw)	16	19	22	16	19	22	22	25	28
Blower 風車 (HP)	1/2 x 1 set 2 x 2 sets 5 x 1 set	1/2 x 1 set 2 x 2 sets 5 x 1 set	1/2 x 1 set 2 x 2 sets 7.5 x 1 set	1/2 x 1 set 2 x 2 sets 5 x 1 set	1/2 x 1 set 2 x 2 sets 5 x 1 set	1/2 x 1 set 2 x 2 sets 7.5 x 1 set	1/2 x 1 set 2 x 2 sets 5 x 1 set	1/2 x 1 set 2 x 2 sets 7.5 x 1 set	1/2 x 1 set 2 x 2 sets 7.5 x 1 set
Ink Motor 油墨馬達 (HP)	1/2	1/2	1/2	1/2	1/2	1/2	1	1	1
Hoist Motor 吊車馬達 (HP)	X	X	X	X	X	X	1/2 x 2 sets	1/2 x 2 sets	1/2 x 2 sets
Pulling Motor 拉袋馬達 (kg/cm)	30 x 2 sets	30 x 2 sets	50 x 2 sets	30 x 2 sets	30 x 2 sets	50 x 2 sets	50 x 2 sets	50 x 2 sets	50 x 2 sets
Total Capacity 總電力 (kw)	22	25	28	25	28	30	40	43	43
Machine Dimension 機械尺寸 (M)	4.35x1.9x2.8	4.35x2.1x2.8	4.35x2.3x2.8	4.35x1.9x2.8	4.35x2.1x2.8	4.35x2.3x2.8	7.3x2.2x4.0	7.3x2.5x4.0	7.3x2.7x4.0
Net Weight 淨重 (kg)	2800	4100	4300	4300	4850	5300	6500	7000	7500


備註：因技術改善而變更規格不另通知。

Remark: Specifications are subject to change due to technological improvement.

CF-I 2006
2008

二色橡膠版吹袋機連線印刷機


2 Colors In-Line Flexographic Printing Machine

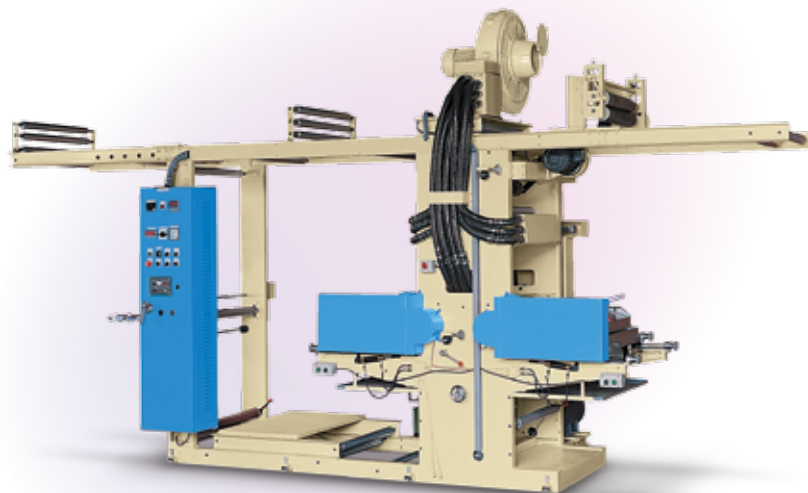

CF-I 4006
4008

四色橡膠版吹袋機連線印刷機

4 Colors In-Line Flexographic Printing Machine

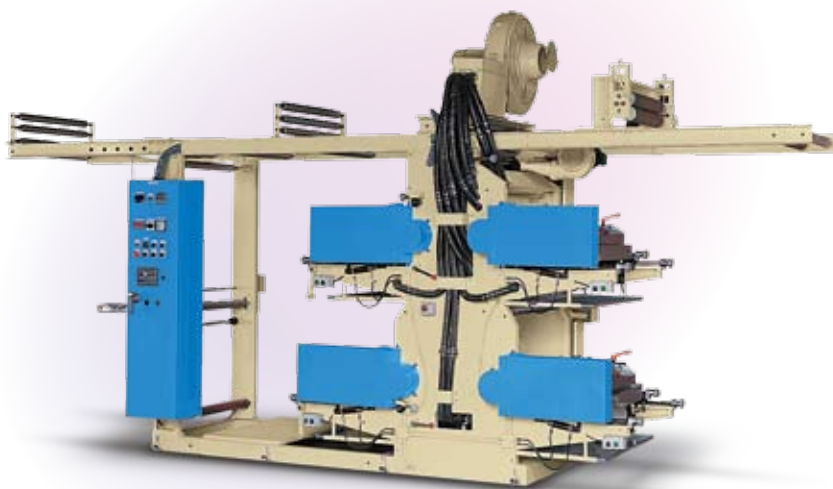

2、4色橡膠版吹袋機連線印刷機規格表

Specification of 2、4 Colors Flexographic Printing Machine for Connectable Inflation Machine.

Model 型號	CF-I 2006	CF-I 2008	CF-I 4006	CF-I 4008
Printing Width 印刷寬度 (mm)	500	800	500	800
Printing Colors 印刷顏色	2		4	
Max. Printing Speed 最快印刷速度	100 M/min.		90 M/min.	
Max. Film Width 最大袋寬 (mm)	600	900	600	900
Printing Length 印刷長度 (mm)	200-1000		200-1000	
Printing Composition 印刷組合	0+2, 1+1		0+4, 1+3, 2+2	
Main Motor 主馬達 (HP)	5	7.5	7.5	7.5
Heater 電熱 (kw)	7	7	13	13
Blower 風車 (HP)	1/2 x 1 set 5 x 1 set	1/2 x 1 set 5 x 1 set	1/2 x 1 set 5 x 1 set	1/2 x 1 set 5 x 1 set
Total Capacity 總電力 (kw)	10	11	25	30
Machine Dimension 機械尺寸 (M)	5.5x1.8x2.65	5.6x2.2x2.65	5.5x1.8x2.65	5.6x2.2x2.65
Net Weight 淨重 (kg)	2200	3000	2600	3300

備 註：因技術改善而變更規格不另通知。


Remark : Specifications are subject to change due to technological improvement.

► 特色：

1. 我們的印刷機適合印刷PP, PE, BOPP, OPP, PE 收縮膜、包裝紙、玻璃紙、不織布。
2. 利用油壓系統來升降印刷輪，操作容易。
3. 配備計數器，到達設定米數會自動停機。
4. 安裝較大的熱風乾燥系統使產量加大，停機時，熱風系統會自動斷電。
5. 停機時，油墨輪仍會轉動，確保油墨不會乾掉
6. 橡膠輪有經過抗氧化及抗溶劑處理。
7. 油墨槽備有蓋子及水龍頭。
8. 可選購對邊機、張力控制、油墨循環幫浦、氣壓軸、陶瓷輪及刮刀系統等。

► Feature：

1. Our machines are suitable to print PP, PE, BOPP, OPP, PE shrinkable film, packing paper, glass paper, non-woven bags.
2. Using hydraulic system to lift up & down the printing cylinders for easy operation.
3. Equipped with meter counter, the machine will stop automatically when reaching the meter.
4. Using high-capacity hot air dryer to make the production faster. The dryer and fan will shut down automatic when machine stops.
5. When machine stops, the ink rolls keep running to avoid drying of ink.
6. The rubber roller is ozone-resistance & solvent-resistance.
7. The ink tray is with cover & faucet.
8. E.P.C., tension controller, ink pump, air shaft, ceramic roller & doctor blade etc. are options.

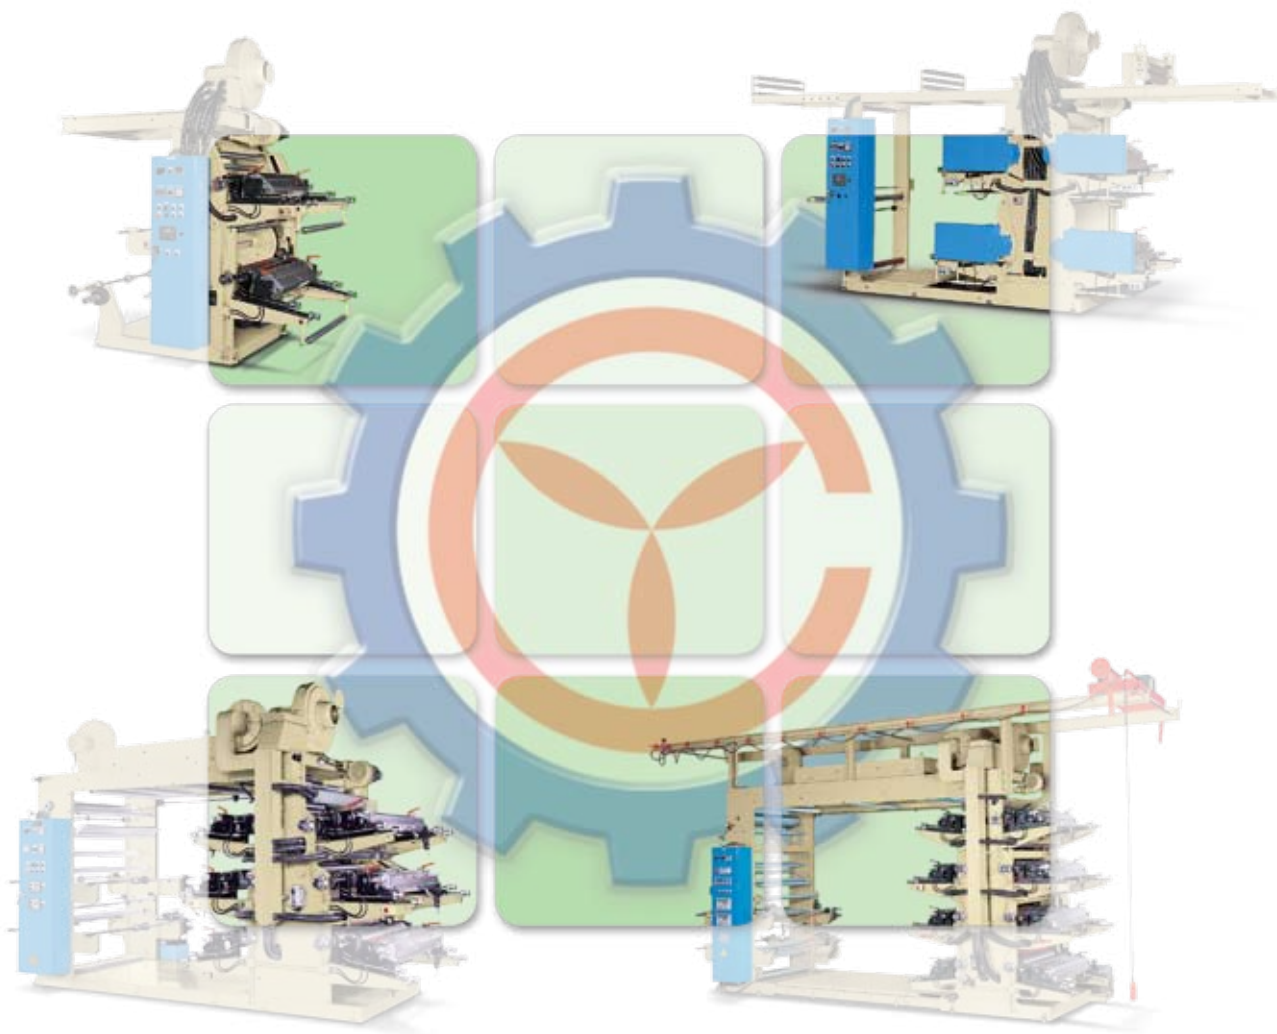



其陽工業股份有限公司
Chyi Yang Industrial Co., Ltd.

333 桃園縣龜山鄉頂湖三街11號

No.11, Dinghu 3rd St., Guishan Township, Taoyuan County 333, Taiwan

Tel : +886-3-328-8686

Fax : +886-3-328-3737

E-mail : cymw@cymw.com.tw Website : www.cymw.com.tw